




# Air Suspension Bearing Co., Ltd

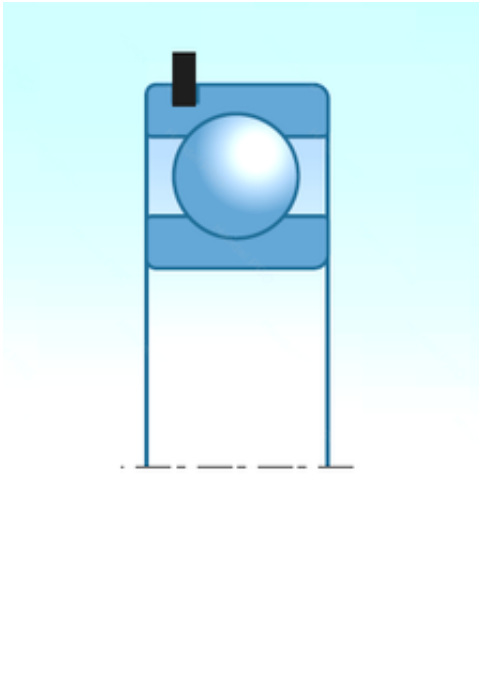

10,000 mm x 30,000 mm x 9,000 mm NTN  
6200LLUNR deep groove ball bearings

Bearing No. 6200LLUNR

6200LLUNR Bearing 2D drawings and 3D CAD models

Size	10x30x9 mm
Bore Diameter	10,000 mm
Outer Diameter	30,000 mm
Width	9,000 mm
d	10,000 mm
D	30,000 mm
B	9,000 mm
C	9,000 mm
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0
EAN	4547359554670
Product Group	B00308
Enclosure	2 Seals
Precision Class	ABEC 1   ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	Yes
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric



## Air Suspension Bearing Co., Ltd

Long Description	10MM Bore; 30MM Outside Diameter; 9MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Other Features	Deep Groove   Double Lip Friction Nitrile Rubber Seal   With Snap Ring   -20 To 120 Deg C   Shell Alvania Prelubricated
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.ntnamerica.com">http://www.ntnamerica.com</a>
Weight / LBS	0.071
Outside Diameter	1.181 Inch   30 Millimeter
Bore	0.394 Inch   10 Millimeter
Inner Race Width	0 Inch   0 Millimeter
Outer Race Width	0.354 Inch   9 Millimeter
bore diameter:	10 mm
static load capacity:	2390 N
outside diameter:	30 mm
precision rating:	ISO Class 0
overall width:	9 mm
finish/coating:	Uncoated
bore type:	Round
bearing material:	High Carbon Chrome Steel
closure type:	Double Sealed
cage material:	Steel



## Air Suspension Bearing Co., Ltd

row type & fill slot:	Single Row Non-Fill Slot
inner ring width:	9 mm
snap ring included:	With Snap Ring
outer ring width:	9 mm
internal clearance:	CN
maximum rpm (grease):	18000 rpm
operating temperature range:	-40 to 120 ° C
fillet radius:	0.6 mm
dynamic load capacity:	5100 N
manufacturer product page:	<a href="#">Click here</a>